

ARIES *free cooling*

Air-cooled water chillers with integrated Free-cooling featuring hermetic scroll compressors. Cooling capacity 51 - 177 kW.



Free-cooling offers notable energy savings and rapid paybacks in industries requiring cold water all year round. ARIES *free-cooling* features separate refrigeration and free-cooling sections, for improved efficiency versus traditional solutions. The difference between the ambient air temperature and the temperature of the fluid in the process circuit is continuously monitored by the microprocessor which, as soon as conditions permit it, automatically activates the free-cooling mode, starting the dedicated fans and diverting the flow of fluid to the free-cooling coil by means of a three-way modulating valve (fitted as standard). The microprocessor independently controls the speed of both the free-cooling and the condensing fans, maximising energy savings and simultaneously optimising refrigerant cycle performance.



Cooling, conditioning, purifying.

BENEFITS

- Maximum exploitation of free cooling and maximum energy efficiency of the system with respect to conventional solutions, thanks to the independence of the coils in terms of air handling;
- Accurate control of water outlet temperature (including at low temperatures down to -15 °C), thanks to the use of a modulating three-way water valve;
- Generous sizing of coils for free-cooling;
- Operates at high ambient temperatures thanks to the compressor unloading;
- Version SSN featuring extremely quiet operation;
- Individually tested in a test chamber like all MTA components and products;
- User friendly control section with simple readout and graphic display;
- Simple to install and maintain, easily accessible components.

MAIN OPTIONS

- Compressor suction and discharge valves;
- Electronic fan speed control;
- Electronic thermostatic expansion valve (except 201-301);
- Hydronic group without pump; (only for 201-301);
- Hydronic group with storage tank and single or twin pumps (351-751 only);
- High, medium and low head pressure pumps;
- Air filter on condenser coils (standard on 201-301);
- Antivibration dampers;
- Simple remote control;
- Replicated remote user terminal;
- Supervisor systems.

STANDARD FEATURES

- Parallel scroll compressor coupling within single refrigerant circuit;
- Finned coil evaporator inside the storage tank (201 - 301) and shell and tube evaporator (351 - 751);
- Condensers and fans installed in a separate compartment with aeraulic isolation, for maximum Free-Cooling effect and maximum overall energy efficiency;
- Axial fans with crescent shaped blades featuring step regulation;
- 3-way modulating valve for Free-Cooling (controlled by microprocessor), water connections within chiller;
- Total Free-Cooling from approximately 10 °C below the water outlet temperature;
- Water differential pressure switch on evaporator (301-751);
- High and low pressure transducers;
- Single or twin high pressure switches for max condensing pressure control;
- Electronic expansion valve with external equalisation, refrigerant filter, sight glass, solenoid valve on liquid line (except 201-301);
- Safety valve (except 201 - 301);
- Microprocessor control with advanced software ensuring optimum control in all conditions;
- All the units are delivered with a phase monitor which provides protection against phase loss and phase reversal;
- The scroll compressors are equipped with crankcase heaters as standard;
- Main switch;
- IP54 electric protection rating;
- Environmentally friendly refrigerant R407C with zero ozone depletion potential.

VERSIONS

- N (standard);
- SN (low noise);
- SSN (very low noise);
- Low ambient temperature version (min. -15 °C).

Semi-graphic backlit PGD terminal.




Aeraulically separate sections for the maximum exploitation of free-cooling.



Servo-controlled three-way modulating hydraulic valve supplied as standard.



Energy saving.

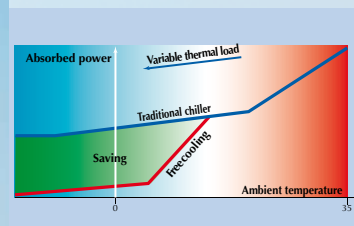

Model AS FC		201	251	301	351	401	501	551	601	701	751	
Free Cooling OFF	Cooling capacity (1)	kW	50,9	54,6	69,3	80,1	97,6	115	133	146	161	177
	Absorbed power (1)	kW	16,2	19,3	20,0	30,1	34,3	40,1	44,4	50,7	52,7	60,1
	Max external air temperature (1)	°C	45	47	47	42	44	43	43	41	45	43
TOTAL Free Cooling	Cooling capacity (1)	kW	50,9	54,6	69,3	80,1	97,6	115	133	146	161	177
	Absorbed power (1) *	kW	1,6	2,3	2,3	4,0	4,0	4,0	4,0	4,0	6,0	6,0
	Total freecooling (1)	°C	1,0	1,4	-0,3	1,6	0,5	-0,7	0,4	-0,7	1,4	0,4
Free Cooling OFF	Cooling capacity (2)	kW	46,5	49,5	63,1	72,8	88,6	105	121	133	147	162
	Absorbed power (2)	kW	15,7	18,8	19,5	29,0	33,1	38,5	42,7	48,6	50,8	57,8
	Max external air temperature (2)	°C	46	48	48	44	45	44	44	43	46	45
TOTAL Free Cooling	Cooling capacity (2)	kW	46,5	49,5	63,1	72,8	88,6	105	121	133	147	162
	Absorbed power (2) *	kW	1,6	2,3	2,3	4,0	4,0	4,0	4,0	4,0	6,0	6,0
	Total freecooling (2)	°C	-1,1	-0,7	-2,3	-0,6	-1,5	-2,5	-1,5	-2,5	-0,6	-1,6
ESEER	-	4,19	3,82	4,07	3,56	3,73	3,79	3,97	3,94	3,91	3,75	
Power supply	V/Ph/Hz	400 ± 10% / 3 - PE / 50										
Circuits / Compressors	N°	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	
Sound pressure level Freecooling OFF (N)	dB(A)	60,2	60,2	61,5	62,6	61,6	61,6	61,6	61,6	61,6	62,3	62,3
Sound pressure level Freecooling OFF (SN)	dB(A)	-	-	-	56,2	55,0	55,0	55,0	55,0	55,2	55,2	
Sound pressure level Freecooling OFF (SSN)	dB(A)	-	-	-	48,9	48,9	47,7	48,7	48,7	49,1	49,1	
Depth	mm	2550	2550	2550	3495	3495	3495	4595	4595	4595	4595	
Width	mm	1400	1400	1400	2188	2188	2188	2188	2188	2188	2188	
Height	mm	2136	2136	2136	1989	1989	1989	1989	1989	1989	1989	
Installed weight	Kg	1494	1494	1509	1858	1980	2276	2536	2541	2752	2803	

All data refers to standard units at the following nominal conditions:

(1) Evaporator water inlet/outlet temperature 15-10 °C, external air temperature 35 °C, glycol water at 30%.

(2) Evaporator water inlet/outlet temperature 12-7 °C, external air temperature 35 °C, glycol water at 30%.

* In total Freecooling mode the absorbed power is only the fans absorbed power.

Sound pressure level in hemispherical field at 10 m from condenser side and 1.6 m from ground. Values with tolerance ± 2 dB.

The sound levels refer to operation of the unit under full load in nominal conditions.

The listed weights and dimensions refer to base chillers with no options fitted.

www.mta-it.com

M.T.A. S.p.A.

Viale Spagna, 8 - ZI
35020 Tribano (PD) - Italy
Tel. +39 049 9588611
Fax +39 049 9588604
info@mta-it.com



MTA is ISO9001 certified, a sign of its commitment to complete customer satisfaction.



MTA products comply with European safety directives, as recognised by the CE symbol.



Cooling, conditioning, purifying.